



(Figure similar)

Figure	Type	Inputs analog	Outputs analog	Input voltage (sensor supply) ⁽¹⁾	Output voltage (actuator supply) ⁽²⁾	ASi address ⁽³⁾	Art. no.
	IP20, 22,5 mm x 92 mm 4 x COMBICON	2 x 4 ... 20 mA / 0 ... 10 V	–	selectable, from ASi or AUX, default ASi	–	1 AB slave	BWU1897
	IP20, 22,5 mm x 92 mm 4 x COMBICON	2 x 4 ... 20 mA / 0 ... 10 V	–	selectable, from ASi or AUX, default ASi	–	1 single slave	BWU1345
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x 0 ... 20 mA / 0 ... 10 V	–	selectable, from ASi or AUX, default ASi	1 single slave	BWU1412
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x 0 ... 20 mA / 0 ... 10 V	–	selectable, from ASi or AUX, default AUX	1 single slave	BWU1727
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x -10 V ... +10 V	–	out of AUX	1 single slave	BWU2224
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x 4 ... 20 mA	–	from ASi or AUX, auto switching	–	1 single slave	BWU1364
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x 0 ... 10 V	–	from ASi or AUX, auto switching	–	1 single slave	BWU1365
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x Pt100	–	out of ASi	–	1 single slave	BWU1368
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x thermocouple type J	–	out of ASi	–	1 single slave	BWU1933
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x thermocouple type K	–	out of ASi	–	1 single slave	BWU2243
	IP20, 22,5 mm x 105 mm 6 x COMBICON	–	4 x 0 ... 20 mA	–	from ASi or AUX, auto switching	1 single slave	BWU1366
	IP20, 22,5 mm x 105 mm 6 x COMBICON	–	4 x 0 ... 10 V	–	from ASi or AUX, auto switching	1 single slave	BWU1367

(1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

(3) **ASi address:** 1 AB Slave (max. 62 AB Slaves/ASi network), 2 AB Slaves (max. 31 modules with 2 AB Slaves), Single Slaves (max. 31 Single Slaves/ASi network), mixed use allowed.

For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".

Upon request, slaves are available with specific ASi Slave profiles.

Analog Modules ASi IP20

Article No.	BWU1897	BWU1345	BWU1364	BWU1365	BWU1368	BWU1933	BWU2243									
General Data																
Device type	Input															
Connection																
ASi/AUX connection	COMBICON clamp															
Periphery connection	COMBICON clamp															
ASi																
Profile	S-7.A.9	S-7.3														
Address	1 AB slave	1 single slave														
Required Master profile	≥M4	≥M3														
Since ASi specification	3.0	2.1														
Operating voltage	30 V (18 ... 31,6 V)	30 V (19 ... 31,6 V)	30 V (24 ... 31,6 V)	30 V (18 ... 31,6 V)												
Max. current consumption	< 80 mA				< 100 mA											
AUX																
Voltage	24 V (18 ... 30 V)			–												
Max. current consumption	500 mA			–												
Input																
Number	2 (4 ... 20 mA/ 0 ... 10 V)	4 (4 ... 20 mA)	4 (0 ... 10 V)	4 (Pt100)	4 (thermo- couple type J)	4 (thermo- couple type K)	4 (thermo- couple type K)									
Resolution	14 Bit (1 µA / 1mV)	16 Bit (1 µA / 1 mV)	16 Bit (1 µA)	16 Bit (1 mV)	16 Bit (0,1 °C)	16 Bit (0,1 °C)										
Range of value	4000 ... 20000 dec. / 0 ... 10000 dec.	4000 ... 20000 dec.	0 ... 10000 dec.	-200 °C ... +850 °C	-200 °C ... +760 °C	–										
Internal resistance	50 Ω / 100 kΩ			–	1 MΩ											
Max. input voltage	25 V			–												
Max. input current	40 mA			–												
Power supply	out of ASi or out of AUX			out of ASi												
Power supply of attached sensors	500 mA out of AUX 50 mA out of ASi			50 mA												
Output																
Resolution	–															
Range of value	–															
Resistance of the actuators	–															
Max. output current	–															
Power supply	–															
Power supply of attached actuators	–															
Environment																
Applied standards	EN 61000-6-2 EN 61000-6-4 EN 60529															
Passive safety (up to PLe/SIL 3)	no ⁽¹⁾				yes ⁽²⁾											
Operating altitude	max. 2000 m															
Operating temperature	0 °C ... +70 °C															
Storage temperature	-25 °C ... +85 °C															
Housing	plastic, for DIN rail mounting															
Pollution degree	2															
Protection category	IP20															
Voltage of insulation	≥ 500 V															
Weight	120 g	145 g														
Dimension (W / H / D in mm)	22,5 / 99 / 92	25 / 105 / 114														

⁽¹⁾ Exclusion of errors for the connection of the two ASi and AUX potentials cannot be assumed in the module. It is not possible to achieve passive safety for the application with this module.

- (2) Exclusion of errors for the connection of the two ASi and AUX potentials can be assumed in the module. Passive safety for the application can only be achieved if this is ensured for all components used.

Article No.	BWU1366	BWU1367	BWU1412	BWU1727	BWU2224
General Data					
Device type	output				
Connection					
ASi/AUX connection	COMBICON clamps				
Periphery connection	COMBICON clamps				
ASi					
Profile	S-7.3				S-7.3.5
Address	1 single slave				
Required Master profile	≥ M3				
Since ASi specification	2.1				
Operating voltage	30 V (24 ... 31,6 V)	30 V (18 ... 31,6 V)			
Max. current consumption	<80 mA				<100 mA
AUX					
Voltage	24 V (18 ... 30 V)				
Max. current consumption	500 mA				
Input					
Resolution	–				
Range of value	–				
Internal resistance	–				
Max. input voltage	–				
Max. input current	–				
Power supply	–				
Power supply of attached sensors	–				
Output					
Number	4 (0 ... 20 mA)	4 (0 ... 10 V)	2 (0 ... 20 mA/0 ... 10 V)	2 (-10 V ... +10 V)	
Resolution	16 Bit (1 µA)	16 Bit (1 mV)	16 Bit (1 µA / 1 mV)	16 Bit	
Range of value	0 ... 20000 dec.	0 ... 10000 dec.	0 ... 20000 dec. / 0 ... 10000 dec.	-10000 ... +10000 dec.	
Resistance of the actuators	–				≥1 kΩ
Max. output current	–				10 mA
Power supply	out of ASi or out of AUX				out of AUX
Power supply of attached actuators	500 mA out of AUX 50 mA out of ASi				500 mA
Environment					
Applied standards	EN 61000-6-2 EN 61000-6-4 EN 60529				
Passive safety (up to PLe/SIL 3)	no ⁽¹⁾				
Operating altitude	max. 2000 m				
Operating temperature	0 °C ... +70 °C				0 °C ... +60°C
Storage temperature	-25 °C ... +85 °C				
Housing	plastic, for DIN rail mounting				
Pollution degree	2				
Protection category	IP20				
Voltage of insulation	≥ 500 V				
Weight	145 g		120 g		
Dimension (W / H / D in mm)	22,5 / 105 / 114		22,5 / 99 / 92		

(1) Exclusion of errors for the connection of the two ASi and AUX potentials cannot be assumed in the module. It is not possible to achieve passive safety for the application with this module.

Wiring rules

Push-in terminals	
General	
Nominal cross section	2.5 mm ²
Conductor cross section	
Conductor cross section solid	0.2 ... 2.5 mm ²
Conductor cross section flexible	0.2 ... 2.5 mm ²
Conductor cross section flexible, with ferrule	without plastic sleeve: 0.2 ... 2.5 mm ² with plastic sleeve: 0.25 ... 2.5 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0.5 ... 1.5 mm ²
AWG	24 ... 14
Stripped insulation length	10 mm

Programming

Bit	Bit setting			
	input			
P3	P2	P1	P0	
BWU1345	0: both channels in current mode and without broken wire recognition 1: normal operation	1: peripheral fault is indicated 0: peripheral fault is not indicated	0: channel 2 is not projected 1: channel 2 is projected	
BWU1364 / BWU1365	0: peripheral fault is not indicated 1: peripheral fault is indicated	Analog module is switched on-/off (bit combination P1 and P2)		
BWU1368	0: 4 wire-mode 1: 2 wire-mode	A peripheral fault can be released through channel X (bit combination P1 and P2)		
BWU1897	–	1: peripheral fault is indicated 0: peripheral fault is not indicated	0: both channels in current mode and without broken wire recognition 1: normal operation	0: 60 H filter in A/D converter active 1: 50 H filter in A/D converter active
BWU1933 / BWU2243	0: external cold-junction compensation 1: internal cold-junction compensation	Analog module is switched on-/off (bit combination P1 and P2)	A peripheral fault can be released through channel X (bit combination P1 and P2)	

Combination of input bits P1 and P2


BWU1364, BWU1365						BWU1368, BWU1933, BWU2243					
Channel c.X is						Peripheral fault can be released through channel					
P1	P2	c.1	c.2	c.3	c.4	P1	P2	1	2	3	4
0	0	on	off	off	off	0	0	yes	no	no	no
0	1	on	on	off	off	0	1	yes	yes	no	no
1	0	on	on	on	off	1	0	yes	yes	yes	no
1	1	on	on	on	on	1	1	yes	yes	yes	yes

Bit	Bit setting			
	P3	P2	P1	P0
BWU1366 / BWU1367	–		–	0: profile is not monitored 1: profile is monitored:
BWU1412 / BWU1727	0: channel 2 is in mode voltage module 1: channel 2 is in mode current module	0: peripheral fault is not indicated 1: peripheral fault is indicated	0: channel 1 is in mode voltage module 1: channel 1 is in mode current module	0: mode of channel 1 and 2 (bit combination P1 and P3) 1: automatic mode recognition
BWU2224	–		–	–

Programming notes					
Article no.	ID Code	ID1 Code		ID2 Code	IO Code
BWU1345	3 _{hex}	ID1 = F (default)		D _{hex}	7 _{hex}
BWU1364, BWU1365, BWU1368, BWU1933, BWU2243	3 _{hex}	ID1 = F (default)		E _{hex}	7 _{hex}
BWU1366, BWU1367	3 _{hex}	ID1 = F (default)		6 _{hex}	7 _{hex}
BWU1412, BWU1727	3 _{hex}	ID1 = F (default)		5 _{hex}	7 _{hex}
BWU1897 ⁽¹⁾	A _{hex}	Code-Definition		9 _{hex}	7 _{hex}
		ID1	14 bit	12 Bit	
		channel 1	0; 2; 3	1	
		channel 1 and 2	4; 5; 7 (default)	6	
BWU2224	3 _{hex}	F _{hex} (default)		5 _{hex}	7 _{hex}

(1) BWU1897 can transfer either 12 or 14 bit-values. Via ID1 the data capacity and the channel number can be defined.

UL-specifications (UL508)	
BWU1345, BWU1364, BWU1365, BWU1366, BWU1367, BWU1368, BWU1412, BWU172,7 BWU1933, BWU1897, BWU2243	
External protection	An isolated source with a secondary open circuit voltage of ≤30 V _{DC} with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

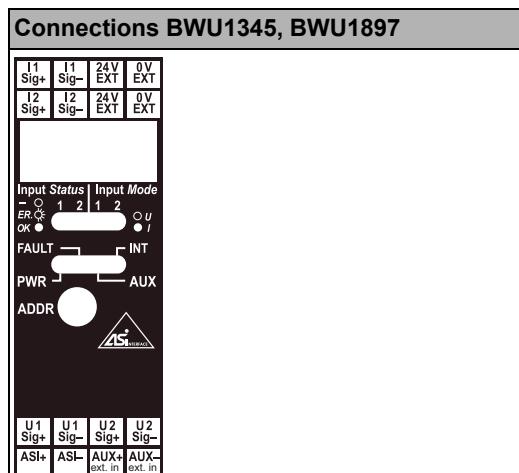


Current or voltage modules can be attached over different clamps. The current supply of the sensors can take place depending upon position of a slide switch from ASi or from external voltage (after PELV). With the help of a 2. slide switch the 2. channel in favor of faster data communication can be switched off. The position of the slide switches is indicated over LEDs.

Supplying external loads:


- by supply out of ASi: 50 mA max.
- y external supply: 500 mA max. (750 mA fuse)

Analog Modules ASi IP20

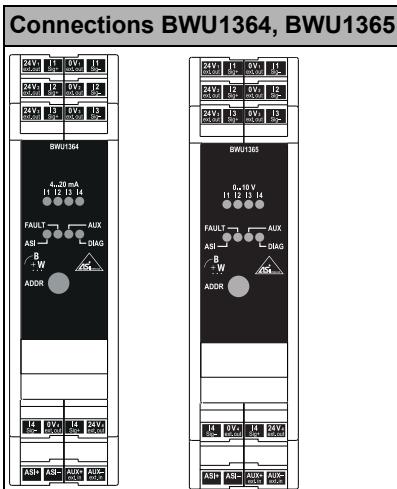


LEDs BWU1364, BWU1365	
PWR (green)	ASi voltage
FAULT (red)	ASi communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
DIAG (green)	Diagnosis
I1 ... I4 (yellow)	State of channel I1, I2, I3, I4

The current supply of the sensors can be made out of ASi or an external voltage supply (according to PELV). The current supply switches automatically to the supply out of external voltage supply, as soon as an external voltage is connected.
The analog sensors and ASi are galvanically separated.

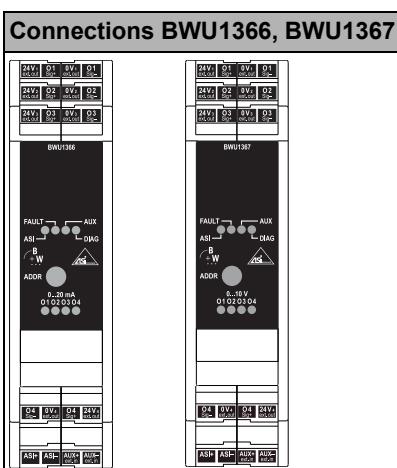


LEDs BWU1366, BWU1367	
PWR (green)	ASi voltage
FAULT (red)	ASi communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
DIAG (green)	Diagnosis
O1 ... O4 (yellow)	State of channel O1, O2, O3, O4

The current supply of the actuators can be made out of ASi or an external voltage supply (according to PELV). The current supply switches automatically to the supply out of external voltage supply, as soon as an external voltage is connected.
The actuators and ASi are galvanically separated.

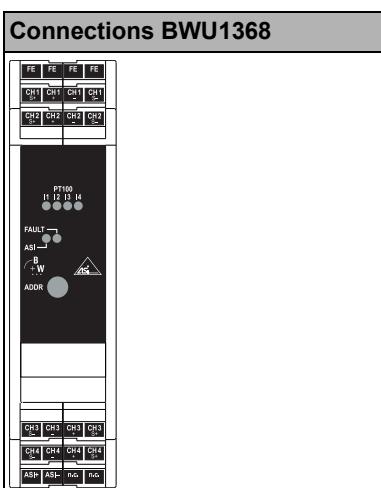


LEDs BWU1368	
PWR (green)	ASi voltage
FAULT (red)	ASi communication error, peripheral fault
I1 ... I4 (yellow)	State of channel I1, I2, I3, I4

The measuring sensors and ASi are galvanically separated.

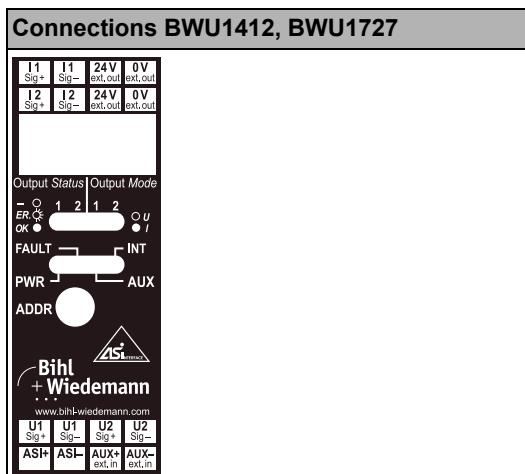


LEDS BWU1412, BWU1727	
PWR (green)	ASi voltage
FAULT (red)	ASi communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
INT (green)	Voltage supply for the analog part out of ASi
Analog 1 (green)	State of channel 1
Analog 2 (green)	State of channel 2
Analog 1 (green)	Channel 1: on: current measurement; off: voltage measurement
Analog 2 (green)	Channel 2: on: current measurement; off: voltage measurement

Current or voltage modules can be attached over different clamps. The current supply of the actuators can take place depending upon position of a slide switch from ASi or from external voltage (after PELV). The position of the slide switch is indicated over LEDs. BWU1897: With the help of a 2. slide switch the 2. channel in favor of faster data communication can be switched off.

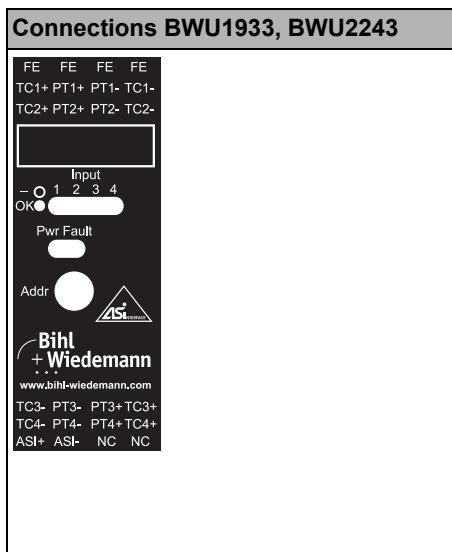

Terminal connections BWU1933, BWU2243	
FE	Functional earth
TCx±	Thermo element +/- (inputs 1 - 4)
PTx±	PT100 +/- (External cold junction compensation)
ASi±	ASInterface +/-
n.c.	Not connected



The inputs ch. 2, ch. 3 and ch 4 are connected with a bridge and a resistor (in default state) to become a valid input value and to avoid peripheral faults.


This can also be obtained by setting the parameter P1 and P2.

The temperature is measured using cold junction temperature compensation. The analog sensors are galvanically separated to ASi. For internal compensation the peripheral fault can be caused by a broken wire of the thermocouple. For the external compensation (Pt100 in connectors 2 and 3) the peripheral fault can also be caused by a broken wire or a short circuit of the Pt100 element. A short circuit of the TC cannot be recognized as an error.

Note:

Precise cold junction compensation requires vertical mounting and natural air circulation. A clearance of at least 5 cm each side is required!

LEDs BWU1933, BWU2243	
PWR (green)	ASi voltage
FAULT (red)	ASi communication error, peripheral fault
In1 ... In4 (yellow)	State of channel I1, I2, I3, I4

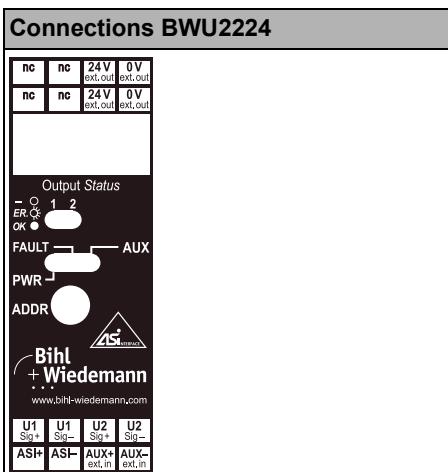

LEDs BWU2224	
PWR (green)	ASi voltage
FAULT (red)	On: ASi communication error; flashing: peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
1 (yellow)	State of channel 1
2 (yellow)	State of channel 2

U1 Sig.- and U2 Sig.- connected.

The outputs are short circuit. The output channels have a common reference potential. The actuators are controlled from separate 24 V and they are galvanically isolated from ASi and AUX.