

Safety Basic Monitors

2 x electronic safe outputs

Up to 4 x 2 channels safe inputs

- optionally the safe inputs will be used as well as standard inputs and signal outputs

Safe ASi outputs are supported

- max. 32 independent ASi outputs
multiple safe ASi outputs possible via a single address

Chip card for storage of configuration data



(Figure similar)



Figure	Model	Inputs Safety, SIL 3, Cat. 4	Inputs safety, expandable to	Outputs Safety, SIL 3, cat. 4	Safety outputs, independent according to SIL 3, expandable to	Safety communication	Fieldbus interface	1 power supply, 1 gateway for 2 ASi networks, inexpensive power supplies	Diagnostic and configuration interface ⁽¹⁾	Article no.
	Safety Basic Monitor with extended features	3 x 2 channels input 3 optional for speed monitor up to 4 kHz	max. 31 x 2 channels, max. 1891 in max. configuration	2 release circuits; 2 x electronic safe output	max. 32, max. 991 in max configuration	Safe Link	Signaling contacts	yes, max. 0,5 A/ASi network, max. 8 A with ASi power supply	Ethernet diagnostic + Modbus TCP ⁽²⁾ diagnostic	BWU2852
	Safety Basic Monitor with extended features	4 x 2 channels inputs 3+4 optional for speed monitor up to 4 kHz	max. 31 x 2 channels	2 release circuits; 2 x electronic safe output	max. 16	—	Signaling contacts	yes, max. 0,5 A/ASi network, max. 8 A with ASi power supply	USB	BWU2700
	Safety Basic Monitor with extended features	4 x 2 channels, inputs 3+4 compatible as replacement with consortial monitor	max. 31 x 2 channels	2 release circuits; 2 x electronic safe output	max. 16	—	ASi monitors	no, max. 8 A/ASi network	USB	BWU2567

(1) Diagnostic and configuration interface

"USB": Access to ASi Master and Safety Monitor with Bihl+Wiedemann proprietary software by using the USB interface.

"Ethernet diagnostic + Modbus TCP diagnostic": Access to ASi Master and Safety Monitor with Bihl+Wiedemann software or diagnostic via Modbus TCP by using the Ethernet diagnostic interface.

(2) Modbus TCP diagnostic capability from Ident.no.: 15775 (see lateral label). For a full-fledged Modbus TCP fieldbus interface use one of our Modbus TCP gateways in stainless steel or Modbus TCP gateways with integrated safety monitor.

Article no.	BWU2567	BWU2700	BWU2852
Connection			
Connection	COMBICON clamps		
Length of connector cable	unlimited ⁽¹⁾		
Safety Monitor			
Respond delay	< 40 ms		
ASi Master			
ASi Master	integrated		
Interface			
Diagnostic and configuration interface	USB		Ethernet diagnostic + Modbus TCP diagnostic
	chip card slot		


Article no.	BWU2567	BWU2700	BWU2852		
ASi					
Voltage	30 V (18 ... 31,6 V)				
Max. current consumption	200 mA ⁽²⁾				
Max. current with internal decoupling out of AUX	—	500 mA ^{(2), (4)}			
AUX					
Voltage	24 V (20 ... 30 V) (PELV)				
Max.current consumption	max. 4 A				
Input					
Number	4 x 2-channel safe inputs SIL3, cat. 4 or 8 standard inputs and signaling outputs	3 x 2-channel safe inputs SIL3, cat. 4 or 6 standard inputs and signaling outputs			
Switching current	15 mA (T = 100 µs), continuously 4 mA at 24 V				
Safety signal	floating contacts inputs 3+4 optional for OSSDs	floating contacts or OSSDs			
Supply voltage	out of AUX				
Sensor supply	short-circuit and overload protected according to EN 61131				
Network connection between the safe input terminals	max. resistance 150 Ω				
Output					
Number	2 (4) output switching elements; semiconductor outputs (output circuits 1 and 2) max. contact load: 700 mA _{DC-13} at 24 V ⁽²⁾				
Supply voltage	out of AUX				
Actuator supply	short-circuit and overload protected according to EN 61131				
Max. output current signal outputs	10 mA per output				
Max. output current for OSSD supply	1,4 A (S71) ⁽²⁾	—			
Test pulse	if output is on: minimum interval between 2 test pulses: 250 ms (from safety version 4.3); maximum pulse width 1 ms				
Display					
LED S1 ... Sn (yellow)	state of safe input S1 ... S8	state of safe input S1 ... S6			
LED SM (green/yellow/red)	state of Safety Monitor				
LED ASi M (green/yellow/red)	state of ASi master				
LED O1 (green/yellow/red)	output 1 has switched				
LED O2 (green/yellow/red)	output 2 has switched				
LED NET (green)	—	Modbus communication active			
1 button	Service				

Article no.	BWU2567	BWU2700	BWU2852
Environment			
Applied standards		EN 60529 EN 61508 EN 62061 EN 61131 EN ISO 13849-1	
Operation altitude		max. 2000 m	
Ambient temperature	0 °C ... +55 °C	-30 °C ... +55 °C ⁽⁵⁾	
	no condensation permitted		
Storage temperature	-25 °C ... +85 °C	-25 °C ... +85 °C	
Housing	plastic, for DIN rail mounting		
Protection class	IP20		
Tolerable loading referring to humidity	according to EN 61131-2		
Voltage of insulation	≥ 500 V		
Weight	160 g		
Dimensions (W / H / D in mm)	22,5 / 99 / 114		
Mounting position	vertical (mounting rail horizontal, ASi clamps pointing downwards) ⁽³⁾		
Mounting	Can be combined with Bihl+Wiedemann devices of the same design and neighboring devices with max. 3 W heat radiation. For higher heat radiation, a minimum distance of one module width (22.5 mm) must be provided.		

(1) Loop resistance ≤ 150 Ω

(2)


Derating for total current at power supply out of AUX (24 V)

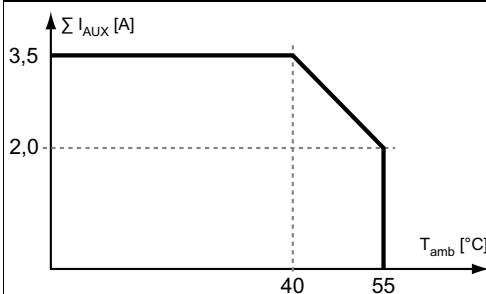

(3) Make sure there is adequate ventilation. The supply air temperature at the bottom of the housing may not exceed values specified under ambient temperature.

(4)

Derating for ASi decoupling out of AUX (BWU2852 only)

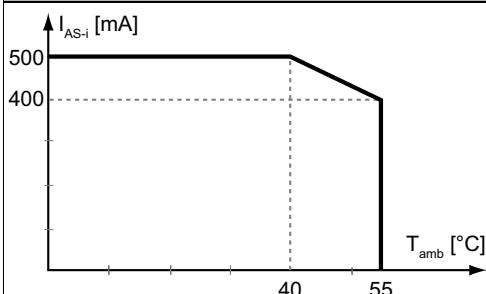

(5) temperature range up to -30°C from Ident.No.≥16254.

Article no.	BWU2567	BWU2700	BWU2852
ASi Safety Monitor			
Safety Monitor	Safety Basis Monitor, successor for ASi consortial Safety Monitor, replacement compatible		Safety Basis Monitor, with extended features
Optimized to ASi Monitor operations	yes		no
Release circuits	16		32
Antivalent switches for local inputs		yes	
Standstill monitors of local inputs	4 x 50 Hz		3 x 50 Hz
Standstill/speed monitors of local inputs	2-4 axes, up to 400 Hz	2-4 axes, up to 4 kHz	1-2 axes, up to 4 kHz
Electrical data			
Power supply decoupling unit	–		integrated

Wiring rules

	Push-in terminals
General	
Nominal cross section	2,5 mm ²
Conductor cross section	
Conductor cross section solid	0,2 ... 2,5 mm ²
Conductor cross section flexible	0,2 ... 2,5 mm ²
Conductor cross section flexible, with ferrule	without plastic sleeve: 0,2 ... 2,5 mm ² with plastic sleeve: 0,25 ... 2,5 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0,5 ... 1,5 mm ²
AWG	24 ... 14
Stripped insulation length	10 mm

BWU2567 / BWU2700	BWU2852	Clamps	Description
		S22, S21, S12, S11 S42, S41, S32, S31 S62, S61, S52, S51	safety input terminal input 1
		S42, S41, S32, S31	safety input terminal input 2
		S62, S61, S52, S51	safety input terminal input 3
		S71, S72, S81, S82	safety input terminal input 4 (except BWU2852)
		1.14ext.out	semiconductor output 1
		2.14ext.out	semiconductor output 2
		0 Vext.out	ground for semiconductor output
		ASi +, ASi -	connection to the ASi Bus
		AUX +ext.in, AUX -ext.in	power supply input

Accessories:

- Safety Software for Configuration, Diagnosis and Programming (art. no. BW2916)
- Chip card, memory capacity 128 KB (art. no. BW2222)
- Safe Contact Expander 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Safe Contact Expander 10 A or 20 A (art. no. BW3016 / BW3281)
- ASi Safety 4I/2O Module, 4 x 2 channels safety inputs and 2 fast electronic safety outputs in IP20 (art. no. BWU2314) as supplementary module
- ASi Speed Monitor (art. no. BWU2427 / BWU2849) as supplementary module
- USB cable for Safety Basic Monitor (art. no. BW2530)